

EPOS2 P 24/5

Programmable Positioning Controller

Hardware Reference



Document ID: rel4273

PLEASE READ THIS FIRST



These instructions are intended for qualified technical personnel. Prior commencing with any activities ...

- you must carefully read and understand this manual and
- you must follow the instructions given therein.

We have tried to provide you with all information necessary to install and commission the equipment in a **secure, safe and time-saving** manner. Our main focus is ...

- to familiarize you with all relevant technical aspects,
- to let you know the easiest way of doing,
- to alert you of any possibly dangerous situation you might encounter or that you might cause if you do not follow the description,
- to **write as little** and to **say as much** as possible and
- not to bore you with things you already know.

Likewise, we tried to skip repetitive information! Thus, you will find things **mentioned just once**. If, for example, an earlier mentioned action fits other occasions you then will be directed to that text passage with a respective reference.



Follow any stated reference – observe respective information – then go back and continue with the task!

PREREQUISITES FOR PERMISSION TO COMMENCE INSTALLATION

The **EPOS2 P 24/5** is considered as partly completed machinery according to EU's directive 2006/42/EC, Article 2, Clause (g) and therefore **is intended to be incorporated into or assembled with other machinery or other partly completed machinery or equipment**.



You must not put the device into service, ...

- unless you have made completely sure that the other machinery – the surrounding system the device is intended to be incorporated to – fully complies with the requirements stated in the EU directive 2006/42/EC!
- unless the surrounding system fulfills all relevant health and safety aspects!
- unless all respective interfaces have been established and fulfill the stated requirements!

TABLE OF CONTENTS

1	About this Document	5
2	Introduction	9
	2.1 Documentation Structure	9
	2.2 Safety Precautions.	10
3	Technical Data	11
	3.1 Electrical Data	11
	3.2 Mechanical Data	14
	3.3 Environmental Conditions	14
	3.4 Order Details	15
	3.5 Standards	15
4	Connections	17
	4.1 Power Supply Connector (J1)	18
	4.1.1 Determination of Power Supply	18
	4.1.2 Use of separate Logic Supply	19
	4.2 Motor Connector (J2).	20
	4.2.1 maxon EC motor (brushless)	20
	4.2.2 maxon DC motor with separated Motor/Encoder Cable.	20
	4.2.3 maxon DC motor with integrated Motor/Encoder Ribbon Cable	21
	4.3 Hall Sensor Connector (J3)	22
	4.4 Encoder Connector (J4).	23
	4.5 Signal Connector (J5)	25
	4.5.1 Digital Inputs 1, 2 and 3	26
	4.5.2 Digital Inputs 4, 5 and 6	27
	4.5.3 Analog Inputs 1 and 2	29
	4.5.4 Auxiliary Supply Voltage Output	29
	4.5.5 Digital Outputs 1, 2 and 3	30
	4.5.6 Digital Output 4	31
	4.6 RS232 Connector (J6).	32
	4.7 CAN Connector (J7, J8).	33
	4.8 CAN Configuration (JP1 & JP1A)	34
	4.8.1 CAN ID (Node Address) in "CAN-M" Supervisor Control (Master) Network	34
	4.8.2 CAN Bus Termination in "CAN-M" Supervisor Control (Master) Network	35
	4.8.3 CAN Bus Autobitrate in "CAN-M" Supervisor Control (Master) Network	35
	4.8.4 CAN Bus Termination in "CAN-S" Slave Network	35
	4.9 USB Connector (J9).	36
	4.10 Status LEDs.	37

••*page intentionally left blank*••

1 About this Document

1.1 Intended Purpose

The purpose of the present document is to familiarize you with the described equipment and the tasks on safe and adequate installation and/or commissioning.

Observing the described instructions in this document will help you ...

- to avoid dangerous situations,
- to keep installation and/or commissioning time at a minimum and
- to increase reliability and service life of the described equipment.

Use for other and/or additional purposes is not permitted. maxon motor, the manufacturer of the equipment described, does not assume any liability for loss or damage that may arise from any other and/or additional use than the intended purpose.

1.2 Target Audience

This document is meant for trained and skilled personnel working with the equipment described. It conveys information on how to understand and fulfill the respective work and duties.

This document is a reference book. It does require particular knowledge and expertise specific to the equipment described.

1.3 How to use

Take note of the following notations and codes which will be used throughout the document.

Notation	Explanation
(n)	referring to an item (such as order number, list item, etc.)
→	denotes "see", "see also", "take note of" or "go to"

Table 1-1 Notations used in this Document

1.4 Symbols and Signs

1.4.1 Safety Alerts



Take note of when and why the alerts will be used and what the consequences are if you should fail to observe them!

Safety alerts are composed of...

- a signal word,
- a description of type and/or source of the danger,
- the consequence if the alert is being ignored, and
- explanations on how to avoid the hazard.

Following types will be used:

1) **DANGER**

Indicates an **imminently hazardous situation**. If not avoided, the situation will result in death or serious injury.

2) **WARNING**

Indicates a **potentially hazardous situation**. If not avoided, the situation **can** result in death or serious injury.

3) **CAUTION**

Indicates a **probable hazardous situation** and is also used to alert against unsafe practices. If not avoided, the situation **may** result in minor or moderate injury.

Example:



DANGER

High Voltage and/or Electrical Shock

Touching live wires causes death or serious injuries!

- Make sure that neither end of cable is connected to live power!
- Make sure that power source cannot be engaged while work is in process!
- Obey lock-out/tag-out procedures!
- Make sure to securely lock any power engaging equipment against unintentional engagement and tag with your name!

1.4.2 Prohibited Actions and Mandatory Actions

The signs define prohibitive actions. So, you **must not!**

Examples:



Do not touch!



Do not operate!

The signs point out actions to avoid a hazard. So, you **must!**

Examples:



Unplug!



Tag before work!

1.4.3 Informatory Signs



Requirement / Note / Remark

Indicates an action you must perform prior continuing or refers to information on a particular item.



Best Practice

Gives advice on the easiest and best way to proceed.



Material Damage

Points out information particular to potential damage of equipment.



Reference

Refers to particular information provided by other parties.

1.5 Trademarks and Brand Names

For easier legibility, registered brand names are listed below and will not be further tagged with their respective trademark. It must be understood that the brands (the below list is not necessarily concluding) are protected by copyright and/or other intellectual property rights even if their legal trademarks are omitted in the later course of this document.

Brand Name	Trademark Owner
Adobe® Reader®	© Adobe Systems Incorporated, USA-San Jose, CA
CANopen® CiA®	© CiA CAN in Automation e.V, DE-Nuremberg
Micro-Fit™ Mini-Fit Jr.™	© Molex, USA-Lisle, IL

Table 1-2 Brand Names and Trademark Owners

1.6 Copyright

© 2013 maxon motor. All rights reserved.

The present document – including all parts thereof – is protected by copyright. Any use (including reproduction, translation, microfilming and other means of electronic data processing) beyond the narrow restrictions of the copyright law without the prior approval of maxon motor ag, is not permitted and subject to persecution under the applicable law.

maxon motor ag
 Brünigstrasse 220
 P.O.Box 263
 CH-6072 Sachseln
 Switzerland

Phone +41 41 666 15 00
 Fax +41 41 666 16 50

www.maxonmotor.com

••*page intentionally left blank*••

2 Introduction

The present document provides you with information on the EPOS2 P 24/5 Programmable Positioning Controller's hardware. It contains...

- performance data and specifications,
- information on connections and pin assignment and
- wiring examples.

maxon motor control's EPOS2 P 24/5 is a small-sized, full digital and free programmable positioning control unit. Due to its flexible and high efficient power stage, the EPOS2 P 24/5 drives brushed DC motors with digital encoder as well as brushless EC motors with digital Hall sensors and encoder.

The sinusoidal current commutation by space vector control offers to drive brushless EC motors with minimal torque ripple and low noise. The integrated position, velocity and current control functionality allows sophisticated positioning applications. The EPOS2 P 24/5 is programmable with a very efficient software tool. The programming languages are according to IEC 61131-3 standard. The built-in CANopen interface allows the design of an easy-to-use standalone multiple axis system, particularly with standard maxon EPOS controllers. In addition, the unit can be operated via any USB or RS232 communication port.

Find the latest edition of the present document, as well as additional documentation and software to the EPOS2 P 24/5 Programmable Positioning Controller also on the Internet: →www.maxonmotor.com

2.1 Documentation Structure

The present document is part of a documentation set. Please find below an overview on the documentation hierarchy and the interrelationship of its individual parts:

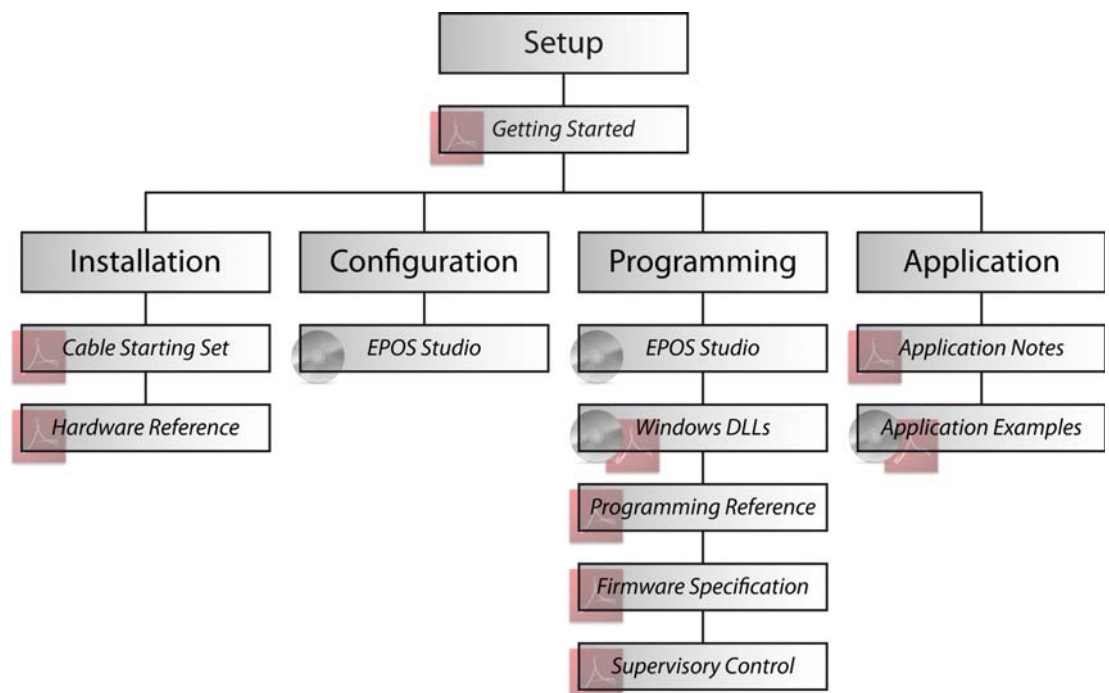


Figure 2-1 Documentation Structure

2.2 Safety Precautions

Prior continuing ...

- make sure you have read and understood chapter “ PLEASE READ THIS FIRST” on page A-2,
- do not engage with any work unless you possess the stated skills (→chapter “1.2 Target Audience” on page 1-5),
- refer to chapter “1.4 Symbols and Signs” on page 1-5 to understand the subsequently used indicators,
- you must observe any regulation applicable in the country and/or at the site of implementation with regard to health and safety/accident prevention and/or environmental protection,
- take note of the subsequently used indicators and follow them at all times.



DANGER

High Voltage and/or Electrical Shock

Touching live wires causes death or serious injuries!

- Consider any power cable as connected to life power, unless having proven the opposite!
- Make sure that neither end of cable is connected to life power!
- Make sure that power source cannot be engaged while work is in process!
- Obey lock-out/tag-out procedures!
- Make sure to securely lock any power engaging equipment against unintentional engagement and tag with your name!



Requirements

- Make sure that all associated devices and components are installed according to local regulations.
- Be aware that, by principle, an electronic apparatus can not be considered fail-safe. Therefore, you must make sure that any machine/apparatus has been fitted with independent monitoring and safety equipment. If the machine/apparatus should break down, if it is operated incorrectly, if the control unit breaks down or if the cables break or get disconnected, etc., the complete drive system must return – and be kept – in a safe operating mode.
- Be aware that you are not entitled to perform any repair on components supplied by maxon motor.



Best Practice

- For initial operation, make sure that the motor is free running. If not the case, mechanically disconnect the motor from the load.



Maximal permitted Supply Voltage

- Make sure that supply power is between 11...24 VDC.
- Supply voltages above 30 VDC will destroy the unit.
- Wrong polarity will destroy the unit.



Electrostatic Sensitive Device (ESD)

- Make sure to wear working cloth in compliance with ESD.
- Handle device with extra care.

3 Technical Data

3.1 Electrical Data

Rating	
Nominal power supply voltage V_{CC}	11...24 VDC
Nominal logic supply voltage V_C (optional)	11...24 VDC
Absolute minimum supply voltage	10 VDC
Absolute max. supply voltage	28 VDC
Max. output voltage	$0.9 \cdot V_{CC}$
Max. output current I_{max} (<1sec)	10 A
Continuous output current I_{cont}	5 A
Switching frequency	50 kHz
Max. efficiency	92%
Sample rate PI – current controller	10 kHz
Sample rate PI – speed controller	1 kHz
Sample rate PID – positioning controller	1 kHz
Max. speed @ sinusoidal commutation (motors with 1 pole pair)	25 000 rpm
Max. speed @ block commutation (motors with 1 pole pair)	100 000 rpm
Built-in motor choke per phase	15 μ H / 5 A

Table 3-3 Electrical Data – Rating

Inputs	
Hall sensor signals	Hall sensor 1, Hall sensor 2 and Hall sensor 3 for Hall effect sensor ICs (Schmitt trigger with open collector output)
Encoder signals	A, A\, B, B\, I, I\ (max. 5 MHz) internal line receiver EIA RS422 Standard
Digital Input 1 (“General Purpose”)	+3...+24 VDC ($R_i = 8 \text{ k}\Omega$)
Digital Input 2 (“General Purpose”)	+3...+24 VDC ($R_i = 8 \text{ k}\Omega$)
Digital Input 3 (“General Purpose”)	+3...+24 VDC ($R_i = 8 \text{ k}\Omega$)
Digital Input 4 (“Home Switch”)	+9...+24 VDC ($R_i = 4 \text{ k}\Omega$)
Digital Input 5 (“Positive Limit Switch”)	+9...+24 VDC ($R_i = 4 \text{ k}\Omega$)
Digital Input 6 (“Negative Limit Switch”)	+9...+24 VDC ($R_i = 4 \text{ k}\Omega$)
Analog Input 1	resolution 12-bit 0...+5 V ($R_i = 47 \text{ k}\Omega$)
Analog Input 2	resolution 12-bit 0...+5 V ($R_i = 47 \text{ k}\Omega$)
CAN ID (CAN identification)	ID 1...127 configurable via DIP switch or software

Table 3-4 Electrical Data – Inputs

Outputs	
Digital Output 1 (“General Purpose”), open drain	max. 24 VDC ($I_L < 100 \text{ mA}$)
Digital Output 2 (“General Purpose”), open drain	max. 24 VDC ($I_L < 100 \text{ mA}$)
Digital Output 3 (“General Purpose”), open drain	max. 24 VDC ($I_L < 100 \text{ mA}$)
Digital Output 4 (“Brake”) open drain	max. 24 VDC ($I_L < 1000 \text{ mA}$)

Table 3-5 Electrical Data – Outputs

Voltage Outputs	
Encoder supply voltage	+5 VDC ($I_L < 100$ mA)
Hall sensors supply voltage	+5 VDC ($I_L < 30$ mA)
Auxiliary output voltage	V_{cc} ($I_L < 1300$ mA)

Table 3-6 Electrical Data – Voltage Outputs

Motor Connections	
maxon EC motor	maxon DC motor
Motor winding 1	+ Motor
Motor winding 2	- Motor
Motor winding 3	

Table 3-7 Electrical Data – Motor Connections

Interfaces		
RS232	RxD; TxD	max. 115 200 bit/s
USB 2.0	Data+; Data-	max. 12 Mbit/s
CAN-S	CAN_H (high); CAN_L (low)	max. 1 Mbit/s
CAN-M	CAN_H (high); CAN_L (low)	max. 1 Mbit/s

Table 3-8 Electrical Data – Interfaces

Memory	
Total memory	1 MByte
Application memory (free programmable)	768 kByte
Non-volatile memory	4 kByte

Table 3-9 Electrical Data – Memory

Status Indicators	
Operation	green LED
Error	red LED
Program status	blue LED
Program error	orange LED

Table 3-10 Electrical Data – LEDs

Connections		
Power Supply	On board: Suitable plug: Suitable terminal:	dual row male header (2 poles) Molex Mini-Fit Jr dual row female receptacle (2 poles) Molex Mini-Fit Jr. 39-01-2020 female crimp terminal Molex Mini-Fit Jr. 44476-xxxx (AWG 16-20)
Motor	On board: Suitable plug: Suitable terminal:	dual row male header (4 poles) Molex Mini-Fit Jr dual row female receptacle (4 poles) Molex Mini-Fit Jr. 39-01-2040 female crimp terminal Molex Mini-Fit Jr. 44476-xxxx (AWG 16-20)
Hall	On board: Suitable plug: Suitable terminal:	dual row male header (6 poles) Molex Micro-Fit 3.0 dual row female receptacle (6 poles) Molex Micro-Fit 3.0 430-25-0600 female crimp terminal Molex Micro-Fit 3.0 43030-xxxx (AWG 20-30)
Signal	On board: Suitable plug: Suitable terminal:	dual row male header (16 poles) Molex Micro-Fit 3.0 dual row female receptacle (12 poles) Molex Micro-Fit 3.0 430-25-1600 female crimp terminal Molex Micro-Fit 3.0 43030-xxxx (AWG 20-30)
RS232	On board: Suitable plug: Suitable terminal:	dual row male header (6 poles) Molex Micro-Fit 3.0 dual row female receptacle (6 poles) Molex Micro-Fit 3.0 430-25-0600 female crimp terminal Molex Micro-Fit 3.0 43030-xxxx (AWG 20-30)
USB	On board: Suitable plug:	USB connector type mini B jack (5 poles) Standard USB cable with type mini B plug connector (5 poles)
CAN-S	On board: Suitable plug: Suitable terminal:	dual row male header (4 poles) Molex Micro-Fit 3.0 dual row female receptacle (4 poles) Molex Micro-Fit 3.0 430-25-0400 female crimp terminal Molex Micro-Fit 3.0 43030-xxxx (AWG 20-30)
CAN-M	On board: Suitable plug: Suitable terminal:	dual row male header (4 poles) Molex Micro-Fit 3.0 dual row female receptacle (4 poles) Molex Micro-Fit 3.0 430-25-0400 female crimp terminal Molex Micro-Fit 3.0 43030-xxxx (AWG 20-30)
Encoder	On board: Suitable locking clip:	Plug DIN41651 (10 poles) for flat band cable, pitch 1.27mm, AWG 28 Tyco C42334-A421-C42 (right) / Tyco C42334-A421-C52 (left)

Table 3-11 Electrical Data – Connections

3.2 Mechanical Data

Mechanical Data	
Weight	approx. 180 g
Dimensions (L x W x H)	105 x 83 x 24 mm
Mounting plate	for M3 screws

Table 3-12 Mechanical Data

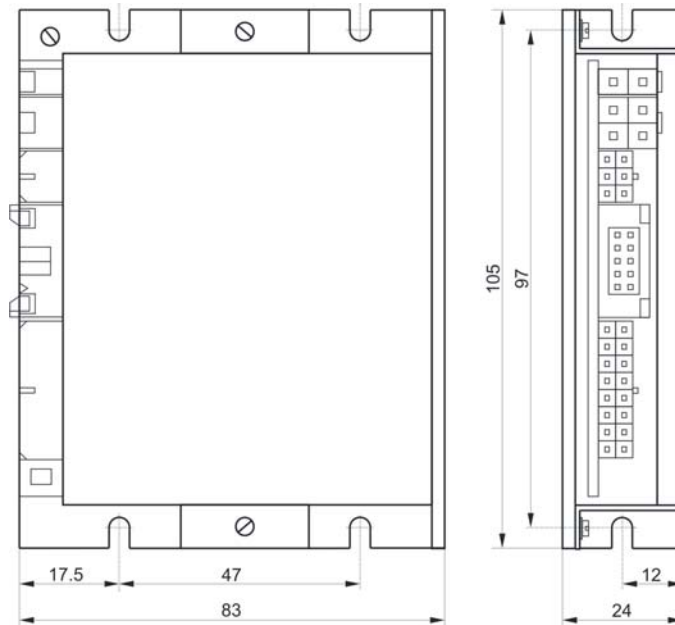


Figure 3-2 Dimensional Drawing [mm]

3.3 Environmental Conditions

Environmental Condition		
Temperature	Operation	-10...+45°C
	Extended Range *1)	+45...+83°C / Derating: -0.132 A/°C
	Storage	-40...+85°C
Humidity	20...80% (condensation not permitted)	

Remark:

*1) Operation within the extended temperature range is permitted. However, a respective derating (declination of max. output current) as to the stated value will apply.

Table 3-13 Environmental Conditions

3.4 Order Details

Order Details	
EPOS2 P 24/5	Order number 378308

Table 3-14 Order Details

3.5 Standards

The described device has been successfully tested for compliance with the below listed standards. In practical terms, only the complete system (the fully operational equipment comprising all individual components, such as motor, servo controller, power supply unit, EMC filter, cabling etc.) can undergo an EMC test to ensure interference-free operation.



Important Notice

The device's compliance with the mentioned standards does not imply its compliance within the final, ready to operate setup. In order to achieve compliance of your operational system, you must perform EMC testing of the involved equipment as a whole.

Electromagnetic Compatibility		
Generic Standards	IEC/EN 61000-6-2	Immunity for industrial environments
	IEC/EN 61000-6-3	Emission standard for residential, commercial and light-industrial environments
Applied Standards	IEC/EN 61000-6-3 IEC/EN 55022 (CISPR22)	Radio disturbance characteristics / radio interference
	IEC/EN 61000-4-2	Electrostatic discharge immunity test 8 kV/6 kV
	IEC/EN 61000-4-3	Radiated, radio-frequency, electromagnetic field immunity test >10 V/m
	IEC/EN 61000-4-4	Electrical fast transient/burst immunity test ±1 kV/±2 kV
	IEC/EN 61000-4-6	Immunity to conducted disturbances, induced by radio-frequency fields 10 Vrms
	IEC/EN 61000-4-8	Power frequency magnetic field 30 A/m

Others		
Environmental Standards	IEC/EN 60068-2-6	Environmental testing – Test Fc: Vibration (sinusoidal)
	MIL-STD-810F	Random transport
Safety Standards	UL File Number E187447 and E232940; unassembled printed circuit board	

Table 3-15 Standards

••*page intentionally left blank*••

4 Connections



Figure 4-3 Interfaces – Designations and Location

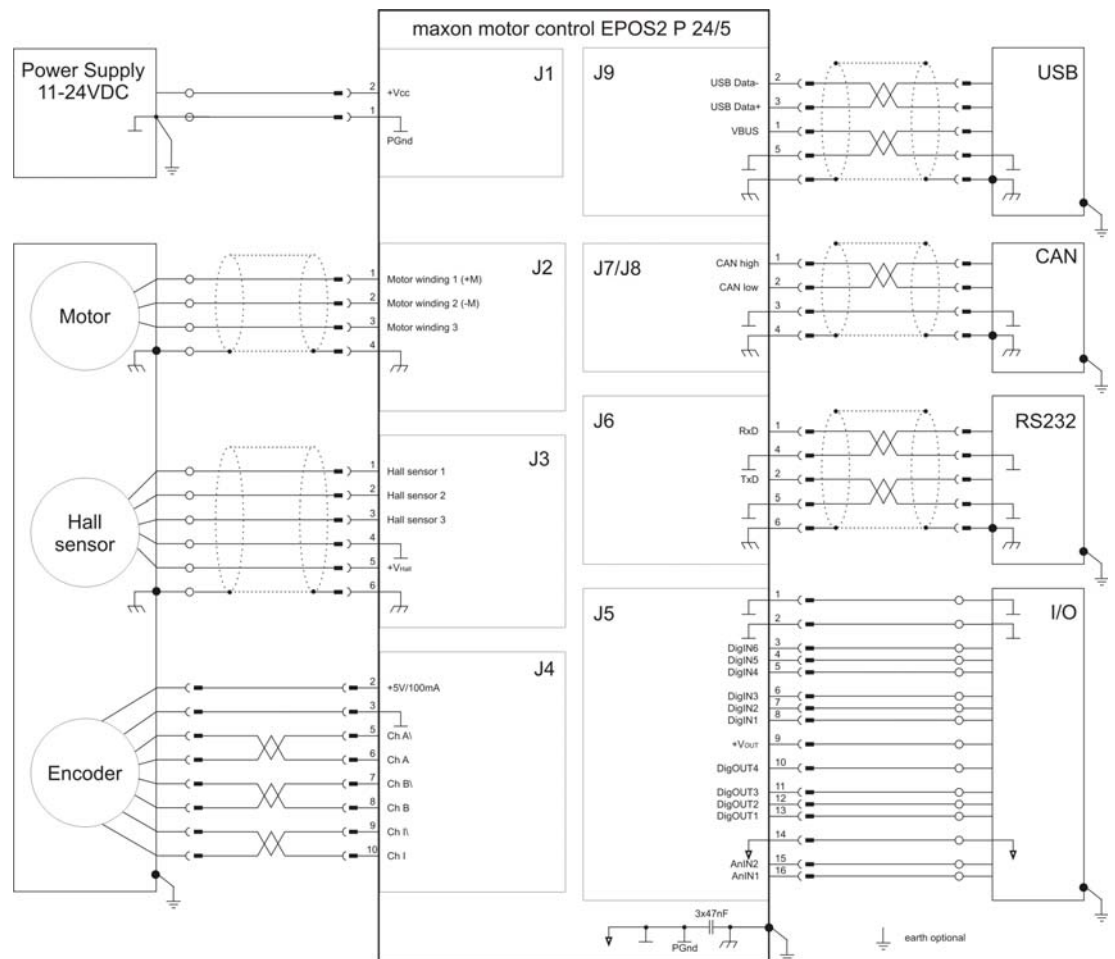


Figure 4-4 Wiring Diagram

4.1 Power Supply Connector (J1)



Best Practice

Keep the motor mechanically disconnected during setup and adjustment phase.

4.1.1 Determination of Power Supply

Basically, any power supply may be used, provided it meets below stated minimal requirements.

Power Supply Requirements	
Output voltage	V_{CC} min. 11 VDC; V_{CC} max. 24 VDC
Absolute output voltage	min. 10 VDC; max. 28 VDC
Output current	Depending on load (continuous max. 5 A / acceleration, short-time max. 10 A)

- 1) Calculate required voltage under load using following scheme (the formula takes a max. PWM cycle of 90% and a max. voltage drop of -1 V at EPOS2 P 24/5 into account):

Known values:

- Operating torque M_B [mNm]
- Operating speed n_B [min⁻¹]
- Nominal motor voltage U_N [Volt]
- Motor no-load speed at U_N , n_0 [min⁻¹]
- Speed/torque gradient of the motor $\Delta n/\Delta M$ [min⁻¹ mNm⁻¹]

Sought value:

- Supply voltage V_{CC} [Volt]

Solution:

$$V_{CC} = \frac{U_N}{n_0} \cdot \left(n_B + \frac{\Delta n}{\Delta M} \cdot M_B \right) \cdot \frac{1}{0.9} + 1 [V]$$

- 2) Choose power supply capable as to above calculation. Thereby consider:
 - a) During braking of the load, the power supply must be capable of buffering the fed back energy, e.g. in a capacitor.
 - b) When using an electronically stabilized power supply, observe that the overcurrent protection must not be activated in any operating state.




Figure 4-5 Power Connector (J1)

Pin	Signal	Description
1	Power_Gnd	Ground of supply voltage
2	+ V_{CC}	Power supply voltage +11...+24 VDC

Accessories	Cable	Power Cable (275829)
Notes	Suitable connector	Molex Mini-Fit Jr. 2 poles (39-01-2020)
	Suitable crimp terminals	Molex Mini-Fit Jr. female crimp terminals (44476-xxxx)
	Suitable hand crimper	Molex hand crimper (63819-0900)

4.1.2 Use of separate Logic Supply

By default, the logic is powered by the regular supply voltage. Optionally, you may wish to feed the logic supply voltage separately, permitting a safe and economical power backup feature.

Basically, any power supply may be used, provided it meets below stated minimal requirements.

Logic Power Supply Requirements	
Output voltage	V_c min. 11 VDC; V_c max. 24 VDC
Absolute output voltage	min. 10 VDC; max. 28 VDC
Min. output power	P_c min. 3 W

Using a **separate logic supply**, you will need to change the jumper JP4.



STOP!

Check on safety precautions before continuing (→page 2-10).

- 1) Open housing and find jumper JP4.
- 2) Open jumper JP4 (→Figure 4-7, right).
- 3) Connect to respective supply voltage (→chapter “4.5 Signal Connector (J5)” on page 4-25).

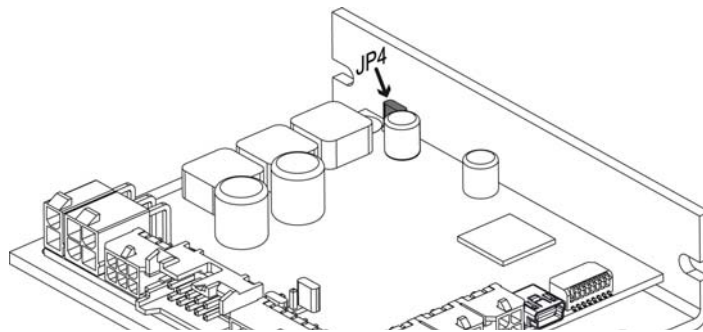


Figure 4-6 Jumper JP4 – Location and Factory Setting



Figure 4-7 Jumper JP4 – closed (left) / open (right)

4.2 Motor Connector (J2)

By default, the controller is set to drive either maxon EC motor (brushless) or maxon DC motor (brushed) with separated motor/encoder cable. Using a **maxon DC motor with integrated motor/encoder ribbon cable**, you will need to change the jumpers JP2 and JP3.




Figure 4-8 Motor Connector (J2)

Accessories	Cable	Motor Cable (275851)
Notes	Suitable connector Suitable crimp terminals Suitable hand crimper	Molex Mini-Fit Jr. 4 poles (39-01-2040) Molex Mini-Fit Jr. female crimp terminals (44476-xxxx) Molex hand crimper (63819-0900)

4.2.1 maxon EC motor (brushless)

Pin	Signal	Description
1	Motor winding 1	EC motor: Winding 1
2	Motor winding 2	EC motor: Winding 2
3	Motor winding 3	EC motor: Winding 3
4	Motor shield	Cable shield

4.2.2 maxon DC motor with separated Motor/Encoder Cable

Pin	Signal	Description
1	Motor (+M)	DC motor: Motor +
2	Motor (-M)	DC motor: Motor -
3	do not connect	
4	Motor shield	Cable shield

4.2.3 maxon DC motor with integrated Motor/Encoder Ribbon Cable



STOP!

Check on safety precautions before continuing (→page 2-10).

- 1) Open housing and find jumpers JP2 and JP3.
- 2) Set jumpers JP2 and JP3 to “closed” position (→Figure 4-10, right).
- 3) For encoder connections →chapter “4.4 Encoder Connector (J4)” on page 4-23.

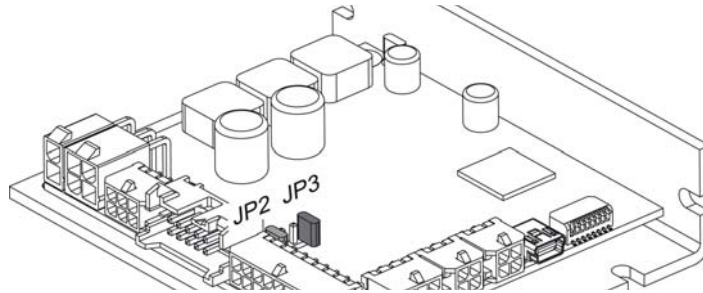


Figure 4-9 Jumpers JP2/JP3 – Location and Factory Setting

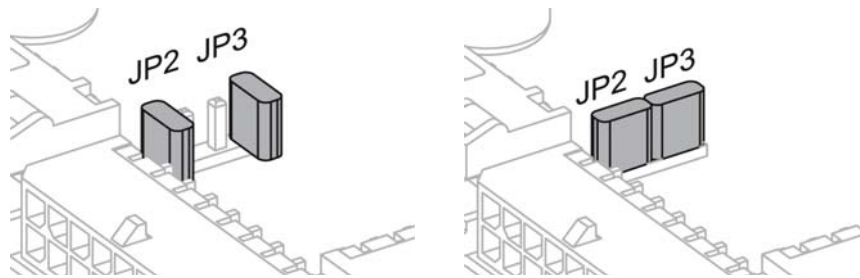


Figure 4-10 Jumpers JP2/JP3 – open (left) / closed (right)

4.3 Hall Sensor Connector (J3)

Hall sensors are required to detect the rotor position of maxon EC motors (brushless).

Suitable Hall effect sensors IC use «Schmitt trigger» with open collector output.

Hall sensor supply voltage	+5 VDC
Max. Hall sensor supply current	30 mA
Input voltage	0...+24 VDC
Logic 0	typically <0.8 VDC
Logic 1	typically >2.4 VDC
Internal pull-up resistor	2.7 kΩ (against +5 VDC)

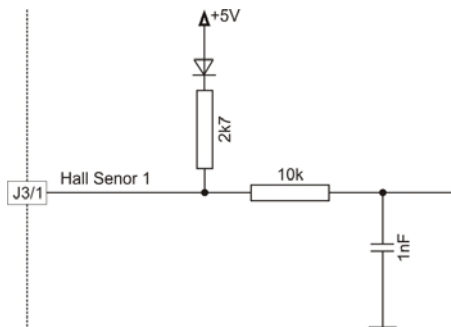


Figure 4-11 Hall Sensor Input Circuit




Figure 4-12 Hall Sensor Connector (J3)

Pin	Signal	Description
1	Hall sensor 1	Hall sensor 1 Input
2	Hall sensor 2	Hall sensor 2 Input
3	Hall sensor 3	Hall sensor 3 Input
4	GND	Ground of Hall sensor supply
5	+VHall	Hall sensor supply voltage +5 VDC / 30 mA
6	Hall shield	Cable shield

Accessories	Cable	Hall Sensor Cable (275878)
Notes	Suitable connector	Molex Micro-Fit 3.0 6 poles (430-25-0600)
	Suitable crimp terminals	Molex Micro-Fit 3.0 female crimp terminals (43030-xxxx)
	Suitable hand crimper	Molex hand crimper (63819-0000)

4.4 Encoder Connector (J4)



Best Practice

The use of encoder with built-in line driver is mandatory. Even though 2-channel will do, we strongly recommend to use only 3-channel versions!

By default, the controller is set for a 500 count per turn encoder. For other encoders, you will need to adjust respective settings via software.

Encoder supply voltage	+5 VDC
Max. encoder supply current	100 mA
Min. differential Input voltage	±200 mV
Line receiver (internal)	EIA RS422 Standard
Max. encoder input frequency	5 MHz

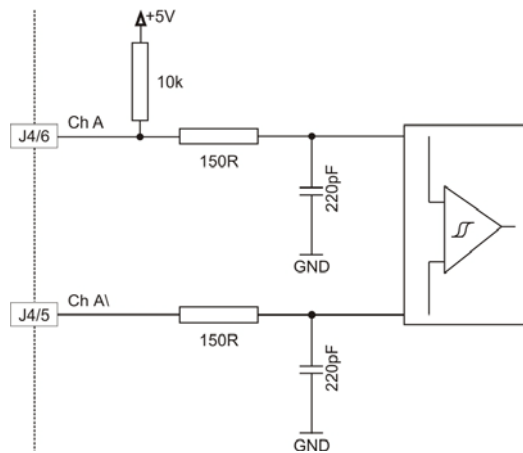


Figure 4-13 Encoder Input Channel




Figure 4-14 Encoder Connector (J4)

Pin	Signal	Description
1	EC motor: none DC motor: Motor +	EC motor: not connected DC motor: + Motor *1)
2	+5 VDC / 100 mA	Encoder supply voltage
3	GND	Ground
4	EC motor: none DC motor: Motor -	EC motor: not connected DC motor: - Motor *1)
5	Channel A\	Channel A complement
6	Channel A	Channel A
7	Channel B\	Channel B complement
8	Channel B	Channel B
9	Channel I\	Index complement
10	Channel I	Index

Remark:

*1) may require change of jumper (J2 / J3) settings (→chapter “4.2.3 maxon DC motor with integrated Motor/Encoder Ribbon Cable” on page 4-21)

Accessories	Cable	Encoder Cable (275934)
Notes	Suitable connector	DIN 41651 Plug, pitch 2.54 mm, 10 poles, plug strain relief

4.5 Signal Connector (J5)

Contains smart multi-purpose digital I/Os configurable as “Positive Limit Switch”, “Negative Limit Switch”, “Home Switch” and “Brake Output”.

Additionally offered are “General Purpose” digital inputs and outputs and analog inputs.




Figure 4-15 Signal Connector (J5)

Pin	Signal	Description
1	D_Gnd	Digital signal ground
2	D_Gnd	Digital signal ground
3	DigIN6	Digital Input 6 “Negative Limit Switch”
4	DigIN5	Digital Input 5 “Positive Limit Switch”
5	DigIN4	Digital Input 4 “Home Switch”
6	DigIN3	Digital Input 3 “General Purpose”
7	DigIN2	Digital Input 2 “General Purpose”
8	DigIN1	Digital Input 1 “General Purpose”
9	+V _{OUT} ^{*1)} +V _C ^{*2)}	Auxiliary supply voltage output (+11...24 VDC) Logic supply voltage input (+11...24 VDC)
10	DigOUT4	Digital Output 4 “Brake”
11	DigOUT3	Digital Output 3 “General Purpose”
12	DigOUT2	Digital Output 2 “General Purpose”
13	DigOUT1	Digital Output 1 “General Purpose”
14	A_Gnd	Analog signal ground
15	AnIN2	Analog Input 2
16	AnIN1	Analog Input 1

Remarks:

*1) jumper JP4 is set (initial setting)

*2) if jumper JP4 is open, a independent logic supply voltage may be applied (→chapter “4.1.2 Use of separate Logic Supply” on page 4-19)

Accessories	Cable	Signal Cable 16core (275932)
Notes	Suitable connector	Molex Micro-Fit 3.0 16 poles (430-25-1600)
	Suitable crimp terminals	Molex Micro-Fit 3.0 female crimp terminals (43030-xxxx)
	Suitable hand crimper	Molex hand crimper (63819-0000)

4.5.1 Digital Inputs 1, 2 and 3

By default, the digital inputs are defined as “General Purpose” and may be configured via software.

DigIN1 “General Purpose”	Connector [J5] Pin [8]
DigIN2 “General Purpose”	Connector [J5] Pin [7]
DigIN3 “General Purpose”	Connector [J5] Pin [6]
D_Gnd	Connector [J5] Pin [1], [2]
Input voltage	0...24 VDC
Max. input voltage	±30 VDC
Logic 0	typically <1.5 V
Logic 1	typically >3.0 V
Input resistance	typically 8 kΩ
Input current at logic 1	typically 3 mA @ 24 VDC
Switching delay	<2 μs @ 5 VDC

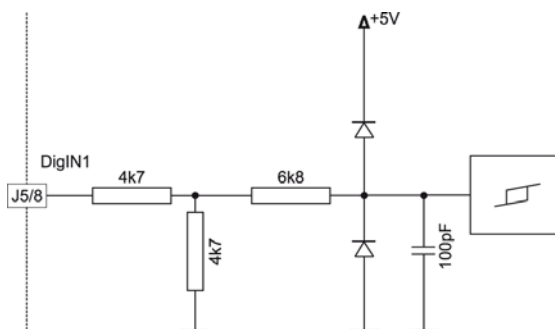


Figure 4-16 DigIN1 Circuit (analogously valid also for DigIN2/3)

4.5.2 Digital Inputs 4, 5 and 6

By default, the digital inputs are defined as follows and may be configured via software.

- Digital Input 4 “Home Switch”
- Digital Input 5 “Positive Limit Switch”
- Digital Input 6 “Negative Limit Switch”

DigIN4 “Home Switch”	Connector [J5] Pin [5]
DigIN5 “Positive Limit Switch”	Connector [J5] Pin [4]
DigIN6 “Negative Limit Switch”	Connector [J5] Pin [3]
D_Gnd	Connector [J5] Pin [1], [2]
Input voltage	0...24 VDC
Max. input voltage	±30 VDC
Logic 0	typically <5.0 V
Logic 1	typically >9.0 V
Input resistance	typically 4 kΩ
Input current at logic 1	typically 6 mA @ 24 VDC
Switching delay	<50 μs @ 11...24 VDC

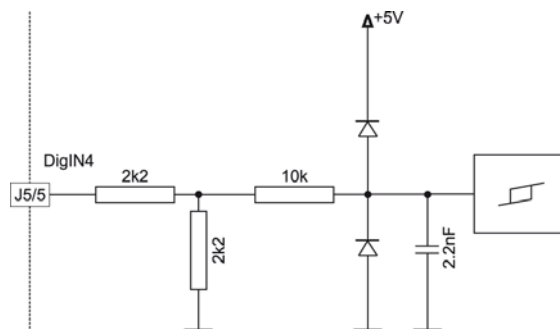


Figure 4-17 DigIN4 Circuit (analogously valid also for DigIN5/6)

For wiring examples →page 4-28.

Wiring Example: "Proximity Switch Type PNP"

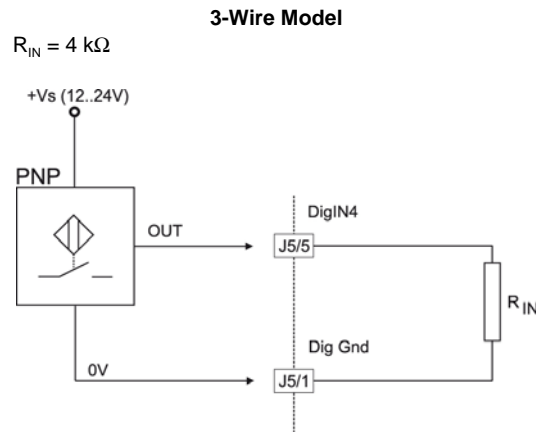


Figure 4-18 DigIN4 – Type PNP Proximity Switch (analogously valid also for DigIN5/6)

Wiring Example: "Proximity Switch Type NPN"

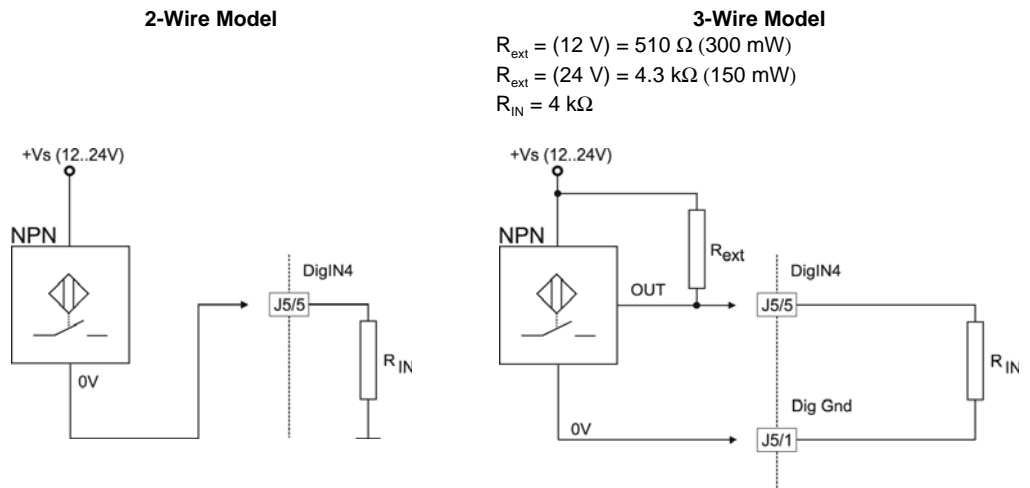


Figure 4-19 DigIN4 – Type NPN Proximity Switch (analogously valid also for DigIN5/6)

4.5.3 Analog Inputs 1 and 2

By default, the analog inputs are defined as “General Purpose” and may be configured via software.

AnIN1	Connector [J5] Pin [16]
AnIN2	Connector [J5] Pin [15]
A_Gnd	Connector [J5] Pin [14]
Input voltage	0...5 VDC
Max. input voltage	±30 VDC
Input resistance	typically 47 kΩ (referenced to A_Gnd)
A/D converter	12-bit
Resolution	0.0012 V
Bandwidth	5 kHz

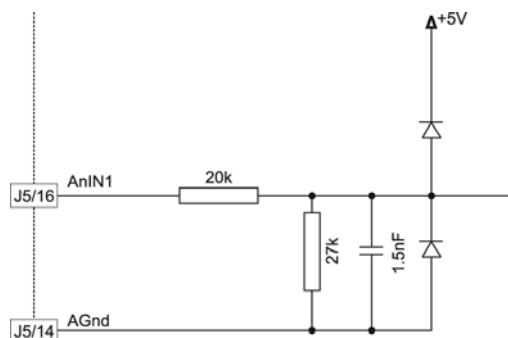


Figure 4-20 AnIN1 Circuit (analogously valid also for AnIN2)

4.5.4 Auxiliary Supply Voltage Output

Can be used as supply voltage for external loads connected to EPOS2 P 24/5's digital outputs.

+V _{OUT}	Connector [J5] Pin [9]
D_Gnd	Connector [J5] Pins [1]; [2]
Output voltage	+11...24 VDC
Output current	max. 1300 mA

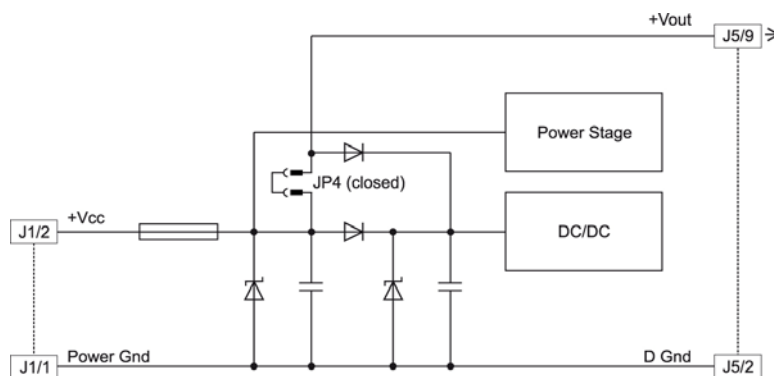


Figure 4-21 Auxiliary Output Voltage Circuit

4.5.5 Digital Outputs 1, 2 and 3

By default, the digital outputs are defined as “General Purpose” and may be configured via software.

DigOUT1 DigOUT2 DigOUT3 D_Gnd	Connector [J5] Pin [13] Connector [J5] Pin [12] Connector [J5] Pin [11] Connector [J5] Pins [1]; [2]
Circuit	Open drain (internal pull-up resistor 2k2 and diode to +5 VDC)

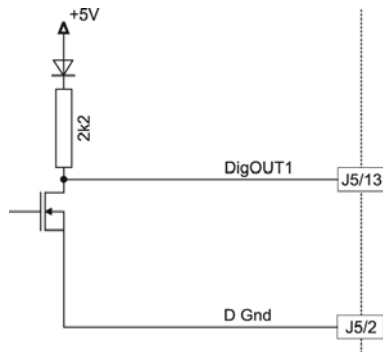


Figure 4-22 DigOUT1 Circuit (analogously valid also for DigOUT2/3)

Wiring Examples:

DigOUT “Sinks”	
Max. input voltage	+30 VDC
Max. load current	100 mA
Max. voltage drop	0.5 V @ 100 mA

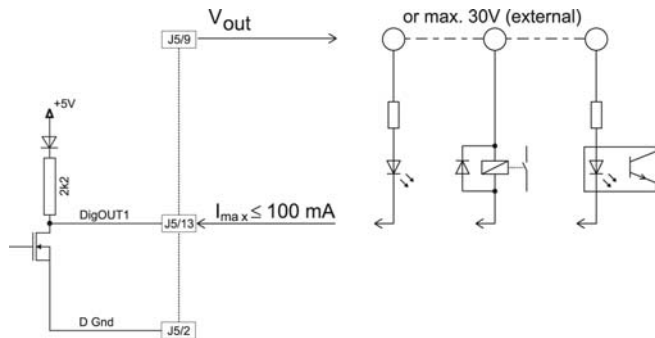


Figure 4-23 DigOUT1 “Sinks” Circuit (analogously valid also for DigOUT2/3)

DigOUT “Source”	
Output voltage	$U_{out} \approx 5V - 0.75 V - (I_{load} \times 2200 \Omega)$
Max. load current	$I_{load} \leq 2 \text{ mA}$

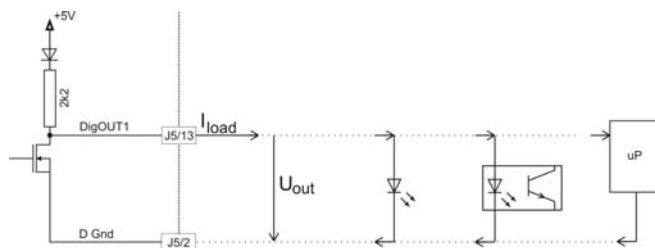


Figure 4-24 DigOUT1 “Source” Circuit (analogously valid also for DigOUT2/3)

4.5.6 Digital Output 4

The digital output is defined as "Brake" (permanent DC voltage applied to serve as magnet brake).

DigOUT4 D_Gnd	Connector [J5] Pin [10] Connector [J5] Pins [1]; [2]
Circuit	Open drain (internal pull-up resistor 2k2 and diode to +5 VDC)

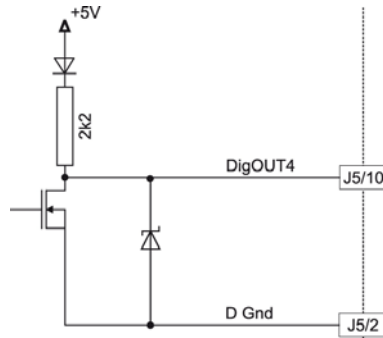


Figure 4-25 DigOUT4 Circuit

Wiring Examples:

DigOUT "Sinks"	
Max. input voltage	+30 VDC
Max. load current	1 A
Max. voltage drop	0.3 V @ 1 A

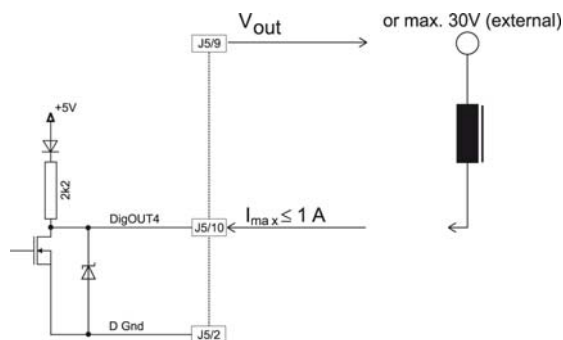


Figure 4-26 DigOUT4 "Sinks" Circuit

DigOUT "Source"	
Output voltage	$U_{out} \approx 5V - 0.75 V - (I_{load} \times 2200 \Omega)$
Max. load current	$I_{load} \leq 2 mA$

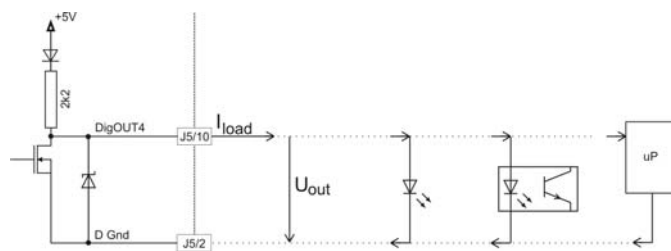


Figure 4-27 DigOUT4 "Source" Circuit

4.6 RS232 Connector (J6)

Max. input voltage	±30 V
Output voltage	typically ±9 V @ 3 kΩ to Ground
Max. bit rate	115 200 bit/s
Internal RS232 driver/receiver	EIA RS232 Standard

Connection of Positioning Controller to PC

EPOS2 P 24/5	PC Interface (RS232), DIN41652
Connector [J6] Pins [4] + [5] "GND"	Pin 5 "GND"
Connector [J6] Pin [1] "EPOS RxD"	Pin 3 "PC TxD"
Connector [J6] Pin [2] "EPOS TxD"	Pin 2 "PC RxD"



Note

- Consider your PC's serial port maximal baud rate.
- The standard baud rate setting (factory setting) is 115'200 bauds.




Figure 4-28 RS232 Connector (J6)

Pin	Signal	Description
1	EPOS RxD	EPOS RS232 receive
2	EPOS TxD	EPOS RS232 transmit
3	not connected	
4	GND	RS232_Ground
5	GND	RS232_Ground
6	Shield	Cable shield

Accessories	Cable	RS232-COM Cable (275900)
Notes	Suitable connector	Molex Micro-Fit 3.0 6 poles (430-25-0600)
	Suitable crimp terminals	Molex Micro-Fit 3.0 female crimp terminals (43030-xxxx)
	Suitable hand crimper	Molex hand crimper (63819-0000)

4.7 CAN Connector (J7, J8)

Standard	ISO 11898-2:2003
Max. bit rate	1 Mbit/s
Max. number of CAN nodes	127
Protocol	CANopen DS-301
Identifier setting	DIP switch or software

Connection of Positioning Controller to CAN Bus Line CiA DS-102

EPOS2 P 24/5	CAN 9 pin D-Sub (DIN41652)
Connector [J7] or [J8] Pin [1] "CAN high"	Pin 7 "CAN_H" high bus line
Connector [J7] or [J8] Pin [2] "CAN low"	Pin 2 "CAN_L" low bus line"
Connector [J7] or [J8] Pin [3] "CAN GND"	Pin 3 "CAN_GND" Ground
Connector [J7] or [J8] Pin [4] "CAN shield"	Pin 5 "CAN_Shield" cable shield



Note

- Consider CAN devices' maximal baud rate.
- The standard baud rate setting (factory setting) is 1 MBit/s.
- Use termination resistor at both ends of the CAN bus (→chapter "4.8.2 CAN Bus Termination in "CAN-M" Supervisor Control (Master) Network" on page 4-35 and chapter "4.8.4 CAN Bus Termination in "CAN-S" Slave Network" on page 4-35).
- CAN-S (J7) is used for a CAN Slaves Network.
- CAN-M (J8) is used for a Supervisor Control (Master) Network.
- For detailed CAN information →separate document «EPOS2 Communication Guide».




Figure 4-29 CAN Connector (J7/J8)

Pin	Signal	Description
1	CAN high	CAN high bus line
2	CAN low	CAN low bus line
3	CAN GND	CAN Ground
4	CAN shield	Cable shield

Accessories	Cables	CAN-COM Cable (275908) CAN-CAN Cable (275926) CAN-Y Cable (319471)
Notes	Suitable connector Suitable crimp terminals Suitable hand crimper	Molex Micro-Fit 3.0 4 poles (430-25-0400) Molex Micro-Fit 3.0 female crimp terminals (43030-xxxx) Molex hand crimper (63819-0000)

4.8 CAN Configuration (JP1 & JP1A)

4.8.1 CAN ID (Node Address) in “CAN-M” Supervisor Control (Master) Network

The CAN ID is set with DIP switch JP1 [1...7]. Addresses (1...127) may be coded using binary code.



Note

- By setting DIP switch JP1 [1...7] address 0 (“OFF”), the CAN ID may be configured by software (changing object “Node ID”, range 1...127).
- The CAN ID results in the summed values of DIP switch addresses 1 (“ON”).
- DIP switch JP1 [8] does not have any impact on the CAN ID.


Switch	Binary Code	Valence	DIP Switch
1	2 ⁰	1	 <p>Figure 4-30 JP1 (Numbering Scheme)</p>
2	2 ¹	2	
3	2 ²	4	
4	2 ³	8	
5	2 ⁴	16	
6	2 ⁵	32	
7	2 ⁶	64	

Table 4-16 CAN ID – Binary Code Values

Examples:

Use following table as a (non-concluding) guide:






CAN ID	DIP Setting	CAN ID/Switch							Calculation	
		1	2	3	4	5	6	7		
		Valence	1	2	4	8	16	32	64	
1			1	0	0	0	0	0	0	1
2			0	1	0	0	0	0	0	2
32			0	0	0	0	0	1	0	32
35			1	1	0	0	0	1	0	1 + 2 + 32
127			1	1	1	1	1	1	1	1 + 2 + 4 + 8 + 16 + 32 + 64

Table 4-17 CAN ID – DIP Switch Settings (Example)

4.8.2 CAN Bus Termination in “CAN-M” Supervisor Control (Master) Network

The CAN bus must be terminated at both ends by a termination resistor of 120 Ω, typically. Depending on utilization of the controller, individual CAN bus termination settings must be performed.

Using DIP switch JP1A [1], the controller-internal bus termination resistor can be activated/deactivated. By default, bus termination is “OFF”, nevertheless, the bus is not terminated.



Figure 4-31 DIP Switch (JP1A) – CAN Bus Termination in CAN-M (left “OFF” right “ON”)

4.8.3 CAN Bus Autobitrate in “CAN-M” Supervisor Control (Master) Network

Using DIP switch JP1A [2], autobitrate can be activated/deactivated. By default, autobitrate is “OFF”.



Figure 4-32 DIP Switch (JP1A) – CAN Bus Autobitrate in CAN-M (left “OFF” right “ON”)

4.8.4 CAN Bus Termination in “CAN-S” Slave Network

The CAN bus must be terminated at both ends by a termination resistor of 120 Ω, typically. Depending on utilization of the controller, individual CAN bus termination settings must be performed.

Using DIP switch JP1 [8], the controller-internal bus termination resistor can be activated/deactivated. By default, bus termination is “OFF”, nevertheless, the bus is not terminated.



Figure 4-33 DIP Switch (JP1 [8]) – CAN Bus Termination in CAN-S (left “OFF” right “ON”)

4.9 USB Connector (J9)

USB Standard	2.0 (Full Speed)
Max. bit rate	12 Mbit/s
Max. bus supply voltage	+5.25 VDC
Typical input current	15 mA
Max. DC data input voltage	-0.5...+3.8 VDC

Connection of Positioning Controller to PC

EPOS2 P 24/5	PC Interface (USB 2.0)
Connector [J9] Pin [1] "V _{BUS} "	Pin 1 "V _{BUS} "
Connector [J9] Pin [2] "USB D-"	Pin 2 "USB D-"
Connector [J9] Pin [3] "USB D+"	Pin 3 "USB D+"
Connector [J9] Pin [5] "GND"	Pin 4 "GND"
Connector [J9] housing "Shield"	Housing "Shield"



Figure 4-34 USB Connector (J9)

Pin	Signal	Description
1	V _{BUS}	USB bus supply input voltage +5 VDC
2	USB D-	USB Data-
3	USB D+	USB Data+
4	not connected	
5	GND	USB Ground
	Shield	Cable Shield

Accessories	Cable	USB Type A - mini B Cable (370513)
Notes	Suitable connector	Standard USB cable with type mini B plug (5 poles)

4.10 Status LEDs

The LEDs display the current status of the EPOS2 P 24/5 as well as possible errors:

- Green LED shows the operating status
- Red LED indicates errors
- Blue LED shows the program status
- Orange LED indicates program errors



For detailed information → separate document «EPOS2 Firmware Specification».

LED				Status / Error
Red	Green	Orange	Blue	
OFF	Slow			Power stage is disabled. Device is in status... • "Switch ON Disabled" • "Ready to Switch ON" • "Switched ON"
OFF	ON			Power stage is enabled. Device is in status... • "Operation Enable" • "Quick Stop Active"
ON	OFF			FAULT state. Device is in status... • "Fault"
ON	ON			Power stage is enabled. Device is in temporary status... • "Fault Reaction Active"
		OFF	Fast	No valid application program.
		OFF	Slow	Application program has stopped.
		OFF	ON	Application program is running.
		Slow (alternating)		Application program in ERROR state.
ON	Flash			No valid firmware or firmware download in progress.
		ON	OFF	Waiting for communication with EPOS Studio due to interrupted firmware download.
		ON	Flash	Firmware download in progress.
Fast = Fast blinking (≈4 Hz) Flash = Flashing (≈0.9 s OFF/≈0.1 s ON) Slow = Slow blinking (≈1 Hz)				

Table 4-18 LEDs – Interpretation of Condition

••*page intentionally left blank*••

LIST OF FIGURES

Figure 2-1 Documentation Structure 9

Figure 3-2 Dimensional Drawing [mm]. 14

Figure 4-3 Interfaces – Designations and Location 17

Figure 4-4 Wiring Diagram. 17

Figure 4-5 Power Connector (J1). 18

Figure 4-6 Jumper JP4 – Location and Factory Setting. 19

Figure 4-7 Jumper JP4 – closed (left) / open (right). 19

Figure 4-8 Motor Connector (J2) 20

Figure 4-9 Jumpers JP2/JP3 – Location and Factory Setting 21

Figure 4-10 Jumpers JP2/JP3 – open (left) / closed (right) 21

Figure 4-11 Hall Sensor Input Circuit. 22

Figure 4-12 Hall Sensor Connector (J3) 22

Figure 4-13 Encoder Input Channel. 23

Figure 4-14 Encoder Connector (J4) 24

Figure 4-15 Signal Connector (J5). 25

Figure 4-16 DigIN1 Circuit (analogously valid also for DigIN2/3). 26

Figure 4-17 DigIN4 Circuit (analogously valid also for DigIN5/6). 27

Figure 4-18 DigIN4 – Type PNP Proximity Switch (analogously valid also for DigIN5/6) 28

Figure 4-19 DigIN4 – Type NPN Proximity Switch (analogously valid also for DigIN5/6) 28

Figure 4-20 AnIN1 Circuit (analogously valid also for AnIN2) 29

Figure 4-21 Auxiliary Output Voltage Circuit 29

Figure 4-22 DigOUT1 Circuit (analogously valid also for DigOUT2/3). 30

Figure 4-23 DigOUT1 “Sinks” Circuit (analogously valid also for DigOUT2/3). 30

Figure 4-24 DigOUT1 “Source” Circuit (analogously valid also for DigOUT2/3) 30

Figure 4-25 DigOUT4 Circuit 31

Figure 4-26 DigOUT4 “Sinks” Circuit 31

Figure 4-27 DigOUT4 “Source” Circuit. 31

Figure 4-28 RS232 Connector (J6) 32

Figure 4-29 CAN Connector (J7/J8) 33

Figure 4-30 JP1 (Numbering Scheme) 34

Figure 4-31 DIP Switch (JP1A) – CAN Bus Termination in CAN-M (left “OFF” right “ON”) 35

Figure 4-32 DIP Switch (JP1A) – CAN Bus Autobitrate in CAN-M (left “OFF” right “ON”) 35

Figure 4-33 DIP Switch (JP1 [8]) – CAN Bus Termination in CAN-S (left “OFF” right “ON”) 35

Figure 4-34 USB Connector (J9) 36

LIST OF TABLES

Table 1-1 Notations used in this Document 5
Table 1-2 Brand Names and Trademark Owners. 7
Table 3-3 Electrical Data – Rating 11
Table 3-4 Electrical Data – Inputs 11
Table 3-5 Electrical Data – Outputs 11
Table 3-6 Electrical Data – Voltage Outputs 12
Table 3-7 Electrical Data – Motor Connections 12
Table 3-8 Electrical Data – Interfaces 12
Table 3-9 Electrical Data – Memory 12
Table 3-10 Electrical Data – LEDs 12
Table 3-11 Electrical Data – Connections 13
Table 3-12 Mechanical Data. 14
Table 3-13 Environmental Conditions 14
Table 3-14 Order Details 15
Table 3-15 Standards. 15
Table 4-16 CAN ID – Binary Code Values 34
Table 4-17 CAN ID – DIP Switch Settings (Example) 34
Table 4-18 LEDs – Interpretation of Condition 37

INDEX

A

additionally applicable regulations **10**
alerts **5**
analog inputs **29**

B

backup power **19**
bus termination **35**

C

cable
 275829 **18**
 275851 **20**
 275878 **22**
 275900 **32**
 275908 **33**
 275926 **33**
 275932 **25**
 275934 **24**
 319471 **33**
 370513 **36**
calculation of required supply voltage **18**
CAN
 bus termination **35**
 interface **33**
CAN ID settings **34**
CAN-M (master network) **34**
CAN-S (slave network) **35**
connector
 J1 **18**
 J2 **20**
 J3 **22**
 J4 **23**
 J5 **25**
 J6 **32**
 J7 **33**
 J8 **33**
 J9 **36**
country-specific regulations **10**

D

digital inputs **26, 27**
digital outputs **30, 31**
DIP switch
 JP1 **34**
 JP1, bus termination (CAN-S) **35**
 JP1, numbering scheme **34**
 JP1A **35**
 JP1A, autobitrate detection (CAN-M) **35**
 JP1A, bus termination (CAN-M) **35**

E

electrical data **11**
environmental conditions, permitted **14**
error display **37**
ESD **10**
example
 setting CAN IDs **34**
 wiring proximity switches **28**

H

how to
 calculate required supply voltage **18**
 configure CAN ID **34**
 interpret icons (and signs) used in the document **5**

I

informatory signs **6**
intended purpose **9**
interface
 CAN **33**
 RS232 **32**
 USB **36**
interfaces, location and designation **17**

J

jumper
 JP2 **21**
 JP3 **21**
 JP4 **19**

L

LEDs **37**

M

mandatory action signs **6**
master network **34**
mechanical data **14**

N

Node Address, configuration **34**

O

operating status, display **37**

P

performance data **11**
power backup **19**
precautions **10**
program error display **37**
program status display **37**
prohibitive signs **6**
purpose
 of the device **9**
 of this document **5**

R

regulations, additionally applicable **10**
RS232
 interface **32**

S

safety alerts **5**
safety first! **10**
signs
 informative **6**
 mandatory **6**
 prohibitive **6**
signs used **5**
slave network **35**
standards, fulfilled **15**
status display **37**
status LEDs **37**
supervisor control network **34**
supply voltage, required **18**
symbols used **5**

T

technical data **11**

U

USB
 interface **36**

••*page intentionally left blank*••

© 2013 maxon motor. All rights reserved.

The present document – including all parts thereof – is protected by copyright. Any use (including reproduction, translation, microfilming and other means of electronic data processing) beyond the narrow restrictions of the copyright law without the prior approval of maxon motor ag, is not permitted and subject to persecution under the applicable law.

maxon motor ag

Brünigstrasse 220
P.O.Box 263
CH-6072 Sachseln
Switzerland

Phone +41 41 666 15 00

Fax +41 41 666 16 50

www.maxonmotor.com